

TECHNICAL DATA SHEET


GPS Test Results per ASTM C578			
Property	Units	Type IX	Standard
Density (U.S) Minimum Requirements	lbs/ft ³	1.8	ASTM D1622 or C303
Thermal Resistance of 1" thick NeoPro	F x ft ² x h/Btu 75°± 2° F, 40°± 2° F	5.0, 5.3	Exceeds ASTM C518 Minimum requirements
Compressive Resistance at yield of 10% deformation	psi	25	ASTM D1621 or C165
Water Vapor Permeance	1", 1perm	2.5	ASTM E96
Water Absorption by Total Immersion	Volume %	1.1	ASTM C272
Flexural Strength	psi	50	ASTM C203
Dimensional Stability (Change in Dimensions)	%Change	2.0	ASTM D2126
Surface Burning Characteristics	Flame Spread Smoke Development	5 25	ASTM E84 or UL 723
Chemical Resistance BASFI 120 Resistance to chemicals	Insensitive to water, the majority of acids and alkalis; sensitive to organic solvents.		
Biological Behavior	No harmful effects on health known		

*ASTM E-84 not required of ASTM C578

** Not included in ASTM

Product	Standard Thickness ¹	Standard Dimensions	R-Value ^{2,3}	Compressive Strength
NeoPro [®] HD ²	1 ¹ / ₁₆ " , 2 ¹ / ₈ "	4' x 8'	R5, R10	25 psi
¹ Board thickness (+/- ¹ / ₁₆ "") ² R-Value is R5 per nominal Inch (1 ¹ / ₁₆ "") Laminated with poly/poly or poly/metal facers. Also available unfaced. Laminated facers are perforated unless requested unperforated. Custom sizes are available. Upon request, NeoPro [®] Products are available with a termite preventative additive.				

³ When using a poly/metal facer, an additional 2.8 R-Value can be achieved with a 3/4 inch air space between foam insulation and final cladding

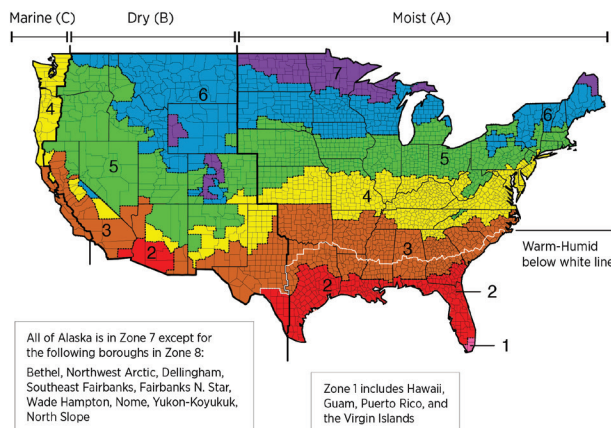

Climate Zone	2009 IECC	2012 IECC	2015 IECC
1	13	13	13
2	13	13	13
3	13	20 or 13+5	20 or 13+5
4	13	20 or 13+5	20 or 13+5
4+5	20 or 13+5	20 or 13+5	20 or 13+5
6	20 or 13+5	20+5 or 13+10	20+5 or 13+10
7+8	21	20+5 or 13+10	20+5 or 13+10

Disclaimer: The information presented herein has been compiled from sources considered to be accurate and reliable but is not guaranteed to be so. In practice, the differences in materials, substrates, storage conditions, actual site conditions and other factors outside of Perma "R" Products' control are such that Perma "R" Products assumes no liability, nor makes any warranty, express or implied for such information, recommendations or instructions related to its products. It is the users responsibility to determine the suitability of any material for specific purpose and to adopt such safety precautions as may be necessary.

2604 SUNSET DR. GRENADA, MS 38901

1-800-647-6130

WWW.PERMARPRODUCTS.COM